


# CSI Canadian Solar Inc.

## CS5F-12

CS5F is designed for powering small commercial applications and consumer products.

CSI's meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities ensure CSI modules meet the highest quality standards possible.

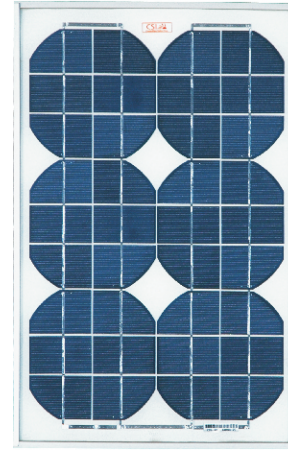

## KEY FEATURES

- **36 High-Efficiency Solar Cells**
- **Special Aluminum Frame Design** - The specially treated frame aluminum substantially increases module endurance against high winds and snow load.
- **Reinforced Solar Glass** - The high-transparency low-iron tempered glass allows maximum light permeability while enhancing stiffness and impact resistance.
- **Advanced Cell Encapsulation** - The interconnected cells are embedded in ultra transparent EVA with multilayer backsheets for additional weather protection.
- **Optimized Module Surface Area** - The distance between the frame edge and the cell circuitry is calculated according to the electrical output optimization.

## APPLICATIONS

- Power source for remote telecommunication equipment
- Monitoring systems for the oil & gas industry
- Traffic, security, environment, and other remote information monitoring systems
- Water pumping systems
- Rural electrification
- Small home power systems
- 12V or 24V battery charging system
- Other industrial and consumer applications

## CERTIFICATIONS

Module Certificates  
• CE

Factory Certificates  
• ISO 9001:2000, ISO/TS 16949:2002  
• QC 080000




## WARRANTY

- Warranty terms upon request

# CS5F-12

## Mechanical Specifications

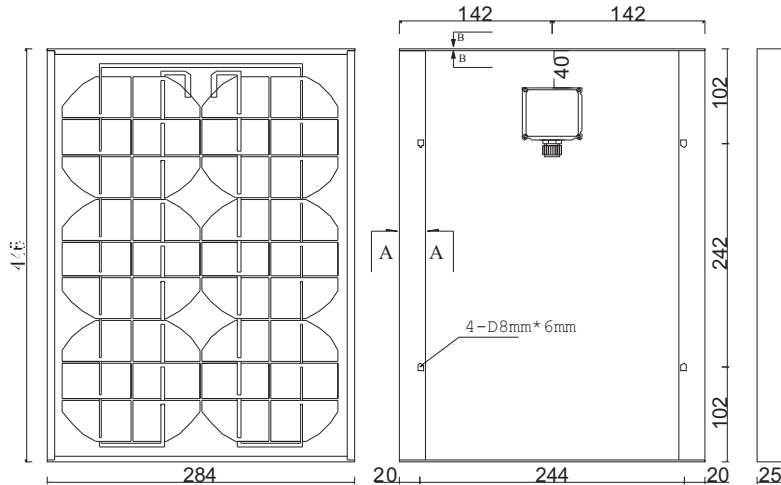

### Dimensions

Length*Width*Depth	mm	446 x 284 x 25
	(in)	(17.6 x 11.2 x 1.0)
Weight	kg (lbs)	1.6 (3.5)

### Cells

Cell Material	Mono or Polycrystalline
Number of Cells	36

## Electrical Characteristics

### Electrical Performance

Under Standard Test Conditions (STC) of irradiance of 1000W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C

		CS5F-12
Maximum Power	Pmax	12W
Voltage at Maximum Power	Vmp	17.3V
Current at Maximum Power	Imp	0.69A
Open Circuit Voltage	Voc	21.5V
Short Circuit Current	Isc	0.78A
Maximum System Voltage		1000V(IEC)/600V(UL)
Temperature Coefficient	Voltage (Voc)	-0.35 %/°C
	Current (Isc)	0.060 %/°C

\*NOCT (Normal Operating Cell Temperature): 45°C

\*\*Module power tolerance: ±1W (approx. ±10%)

\*Specifications included in this datasheet are subject to change without prior notice.



**Corporate Headquarters**  
 675 Cochrane Drive, East Tower 6th Floor  
 Markham, ON, Canada L3R 0B8  
 Tel: (905) 530-2334 / Fax: (905) 530-2001  
 E-mail: inquire@csisolar.com

Web: www.csisolar.com

**US Office**  
 3420 East Shea Boulevard, Suite 200  
 Phoenix, AZ, USA 85028  
 Tel: (602) 953-5242 / Fax: (602) 953-5245  
 E-mail: inquire@csisolar.com